

FAVEN R6 + R8

FAVENLIGHTING.COM

UNDER CANOPY LIGHTING

Financials

ROI IN ONE HARVEST

REDUCE LABOR INPUTS

Yield

DRIVE REVENUE TARGETS

25-35% YIELD INCREASE
ON AVERAGE

Quality

SELL PRODUCT QUICKLY

**REDUCE LOW VALUE
SKUS**

Uniformity

**TOP DOLLAR FOR YOUR
PRODUCT**

**UNIFORM IN COLOR, SHAPE,
AND DENSITY**



TECHNICAL SPECIFICATIONS


AMPS	DAISY-CHAIN MAX # CONNECTED	VOLTAGE
1.0	10	120
0.5	17	240
0.43	20	277



120 W DIMMABLE LED FIXTURE
46" L X 2.9" W X 3.3" H
IP66 RATING
5 YR WARRANTY


R6

GEARED FOR HPS

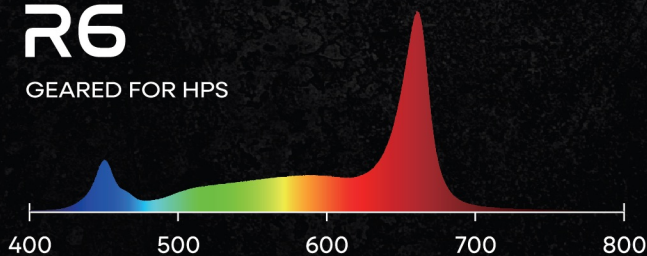

R8

GEARED FOR LED

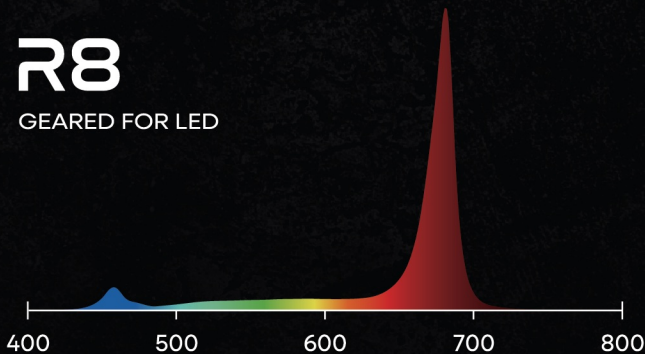

PPE (μMOL/J)	UP TO 2.9
PPF (μMOL/S)	UP TO 340
INPUT POWER	120W
INPUT VOLTAGE	120V 240V 277V
INPUT CURRENT	1.0A 0.5A 0.43A
FREQUENCY	50/60HZ
FIXTURE DIMENSIONS	45.6" L X 2.9" W X 3.3" H 115.7CM*7.5CM*8.5CM
WEIGHT	5.73LB / 2.6KG
THERMAL MANAGEMENT	PASSIVE
OPERATION TEMPERATURE	95°F/35°C MAX
LIGHT DISTRIBUTION	120°
DIMMING	25%-100%/OFF
LIFETIME	>50000HRS




INFO@FAVENLIGHTING.COM



FAVENLIGHTING.COM

THREE PLANTS WIDE STANDARD SET UP

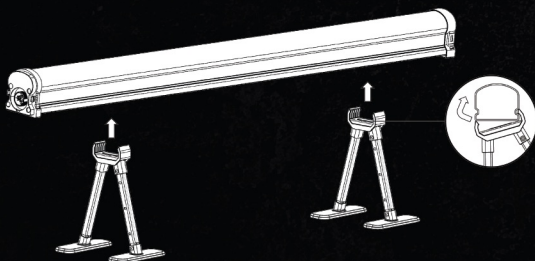

ADJUSTABLE STANDS 8", 10", 12"

FAQ

CLICK OR SCAN



SALES AND INQUIRIES:

INFO@FAVENLIGHTING.COM

SALES@FAVENLIGHTING.COM

916.235.3295

TECHNICAL SUPPORT:

916.234.6569

YOUTUBE + INSTAGRAM:

@FAVENLIGHTING